



## U4127 Digital Satellite Receiver

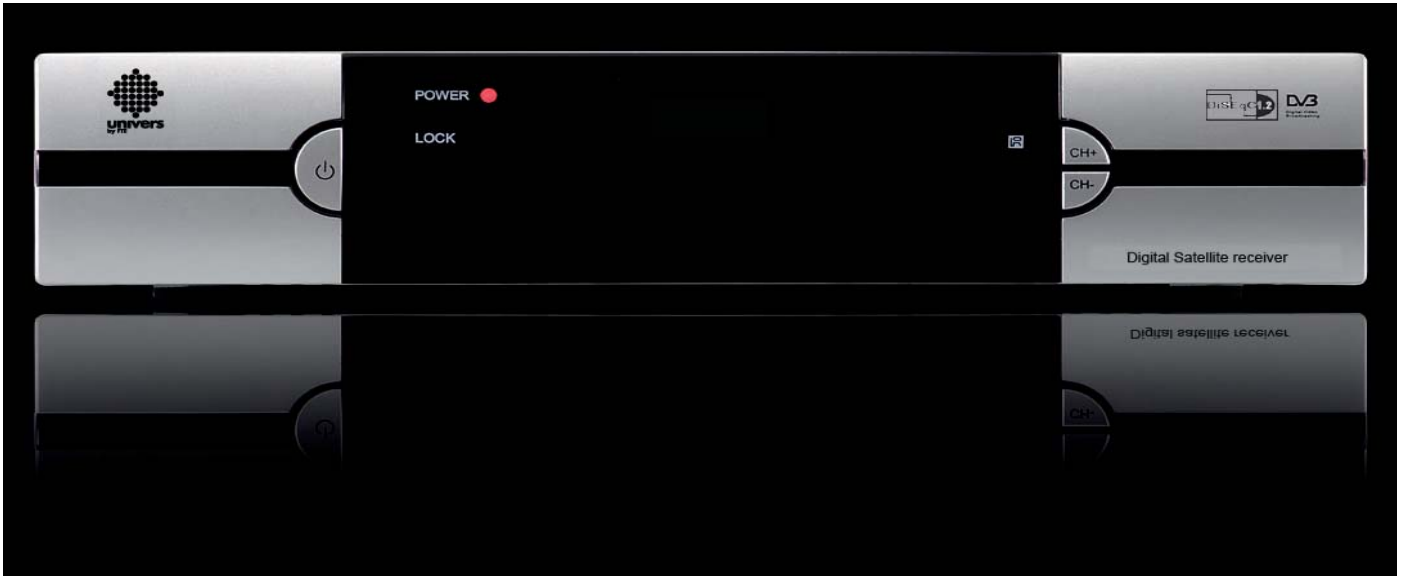

## Rear

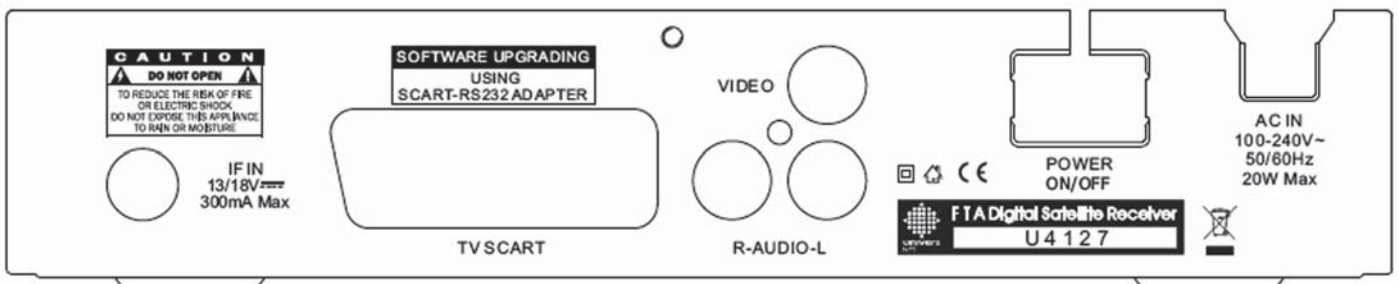

<b>U4127 Digital Satellite Receiver</b>	
<b>VIDEO</b>	
Decoding Bit rate Output Active pixel Output connector	MPEG-2 & MPEG-1 compatible Max 15Mbps PAL/NTSC 720x480 @ 30fps; 720x576 @25fps Scart /RCA
<b>AUDIO</b>	
Decoding Mode Bit rate Output connec	MPEG-2/MPEG-1 layer I & II Mono, Dual, Stereo, Joint stereo Max 384Kbps Scart /RCA
<b>DEMODULATOR</b>	
Demodulation Symbol rate Outer code Inner code Energy dispersion	QPSK SCPC/MCPC RS (204, 188, 8) ALL DVB rates DVB-S recommendation
<b>INPUT SIGNAL</b>	
Frequency Input level Channel bandwidth Input socked	950MHz ~ 2150MHz -65dBm ~ -25dBm 36MHz F-type connector
<b>LNB CONTROL</b>	
Power supply Polarized control DiSEqC control	13/18V (500mA max) with short circuit protection 13/18V polarization (vertical/horizontal) DiSEqC1.0 DiSEqC1.1 and DiSEqC 1.2
<b>MISCELLANEOUS</b>	
Supply voltage Power consumption Stand-by power consumption Operation temperature Storage temperature Dimension (W x D x H) Weight	100~240VAC 50~60 Hz Typ. 21 watts / Max. 30 watts < 3 watts +5° a +40° -20° a +70° 210x133x43 mm 1,1 Kg