


U4149 DVB-T Receiver



Technical Features U4149

Sleep Timer	Electronic Program Guide (EPG)	TV-Radio
FTA channels	Teletext	Update through RS 232
OSD multi-language	Games	Power Supply 5 VDC for active indoor antenna
3 x RCA A/V	1 Scart	

Rear

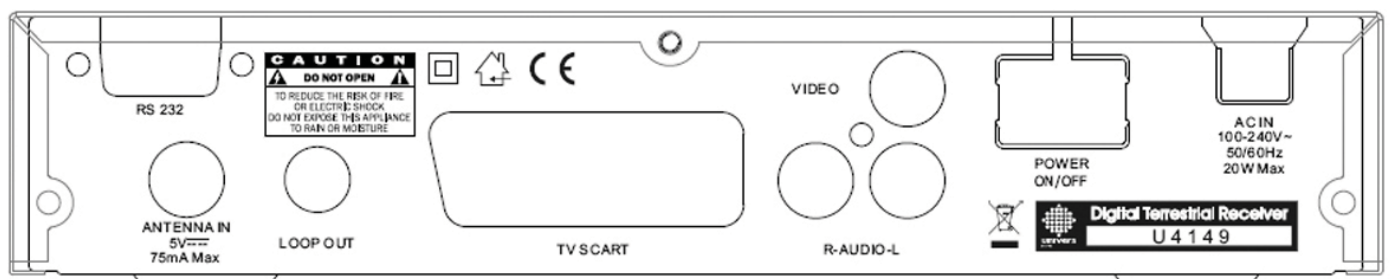

U4149 DVB-T Receiver	
VIDEO	
Decoding Bit rate Output format Aspect ratio Active pixel Output connectivity	Compatible MPEG-2 & MPEG-1 Max. 15Mbps PAL/NTSC 4:3, 16:9, Auto720x480 @ 30fps; 720x576 @25fps Scart / RCA
AUDIO	
Decoding Sampling rate Output connectivity	MPEG-2/MPEG -1 Layer I & II 32 /44,1/ 48 Khz Scart / RCA
INPUT SIGNAL	
Demodulation Guard	COFDM 2k, 8k 1/4, 1/8, 1/16, 1/32
SIGNAL	
Frequency Input Level	VHF-UHF 32 - 90 dBuV
MISCELLANEOUS	
Supply voltage Power consumption Stand-by power consumption Operation temperature Dimension Weight	100~240VAC 50~60 Hz Typ. 21 watts / Max. 30 watts < 3 watts +5°C to +40°C 210x133x43 mm 1,1 Kg