


U4113 Digital Receiver DVB-S FTA



Rear

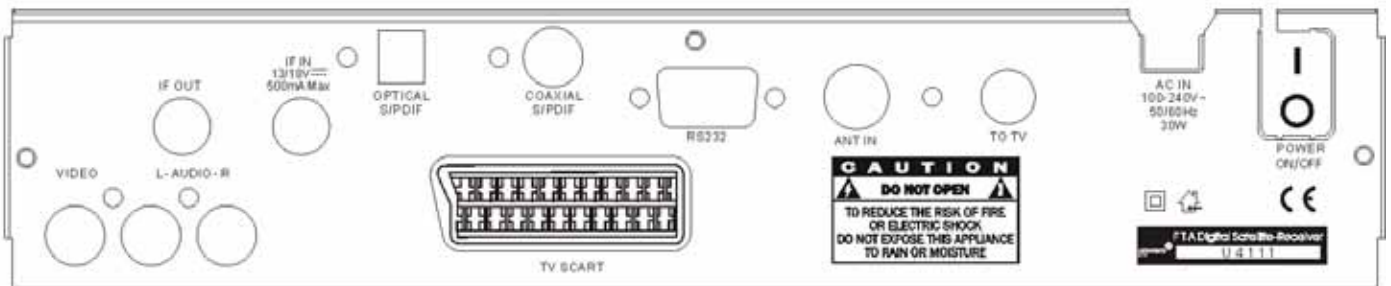

U4113 Digital Receiver DVB-S FTA	
VIDEO	
Decoding Bit rate Output Aspect ratio Active pixel Output connector	MPEG-2 & MPEG-1 compatible Max 15Mbps PAL/NTSC 4:3, 16:9, Auto 720x480 @ 30fps; 720x576 @25fps Euroconector / RCA
AUDIO	
Decoding Mode Bit rate Output connector	MPEG-2/MPEG-1 layer I & II Mono, Dual, Stereo, Joint stereo Máx. 384Kbps Euroconector / SPDIF (coaxial and optic) / RCA
DEMODULADOR	
Demodulation Symbol rate Outer code Inner code Energy dispersion	QPSK SCPC/MCPC RS (204, 188, 8) ALL DVB rates DVB-S recommendation
INPUT SIGNAL	
Frequency Input level Channel bandwidth Input socked	950MHz ~ 2150MHz -65dBm ~ -25dBm 36MHz F-type connector
RF MODULATOR	
Input Output Banda TV Standard Output Channel	IEC 169-24 Male x 1 IEC 169-24 Female x 1 UHF PAL BG/I/DK, NTSC M 21~69(PAL), 14~83(NTSC)
LNB CONTROL	
Power supply Polarized control DiSEqC control	13/18V (500mA max) with short circuit protection 13/18V polarization (vertical/horizontal) DiSEqC1.0 DiSEqC1.1 and DiSEqC 1.2
MISCELLANEOUS	
Supply voltage Power consumption Stand-by power consumption (Low Power Consumption mode) Operation temperature Storage temperature Dimension (W x D x H) Weight	100 - 240 Vac 50-60hz Typ. 21 watts / Máx. 30 watts < 3 watts +5° a +40° -20° a +70° 270x260x65 mm 1.2Kg