


## U4114 Digital Receiver DVB-S FTA - Caravan Installations



### Rear

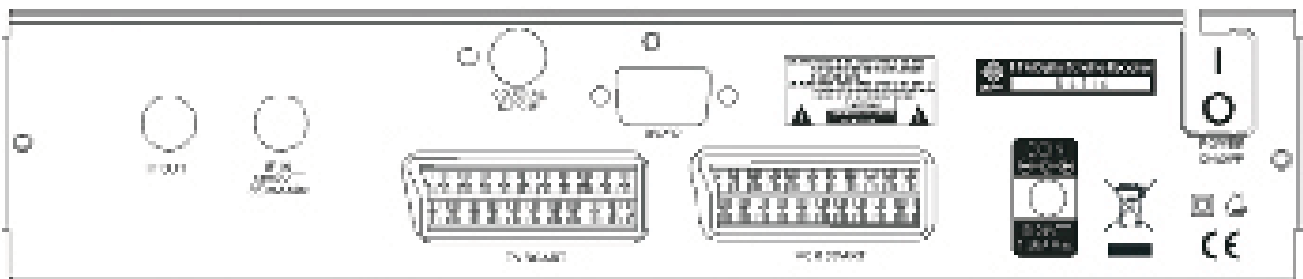

U4114 Digital Receiver DVB-S FTA	Caravan Installations
<b>VIDEO</b>	
Decoding Bit rate Output Aspect ratio Active pixel Output connector	Compatible MPEG-2 & MPEG-1 Máx. 15Mbps PAL/NTSC 4:3, 16:9, Auto 720x480 @ 30fps; 720x576 @25fps Euroconector X2
<b>AUDIO</b>	
Decoding Mode Bit rate Output connec	MPEG-2/MPEG-1 layer I & II Mono, Dual, Stereo, Joint stereo Máx. 384Kbps Euroconector X2/ SPDIF
<b>DEMODULATOR</b>	
Demodulation Symbol rate Outer code Inner code Energy dispersion	QPSK SCPC/MCPC RS (204, 188, 8) ALL DVB rates DVB-S recommendation
<b>INPUT SIGNAL</b>	
Frequency Input level Channel bandwidth Input socked	950MHz ~ 2150MHz 65dBm ~ -25dBm 36MHz F-type connector
<b>LNB CONTROL</b>	
Power supply Polarized control DiSEqC control	13/18V (500mA máx.) con protección cortocircuito Polarización 13/18V (vertical/horizontal) DiSEqC1.0, DiSEqC1.1 y DiSEqC 1.2
<b>MISCELLANEOUS</b>	
Supply voltage Power consumption Operation temperature Storage temperature Dimension (W x D x H) Weight	100~240VAC 50~60 Hz Typ. 21 watts / Máx. 30 watts +5° a +40° -20° a +70° 240x190x45 mm 1.1Kg