


## U4148 Receptor TDT / DVB-T



## Rear

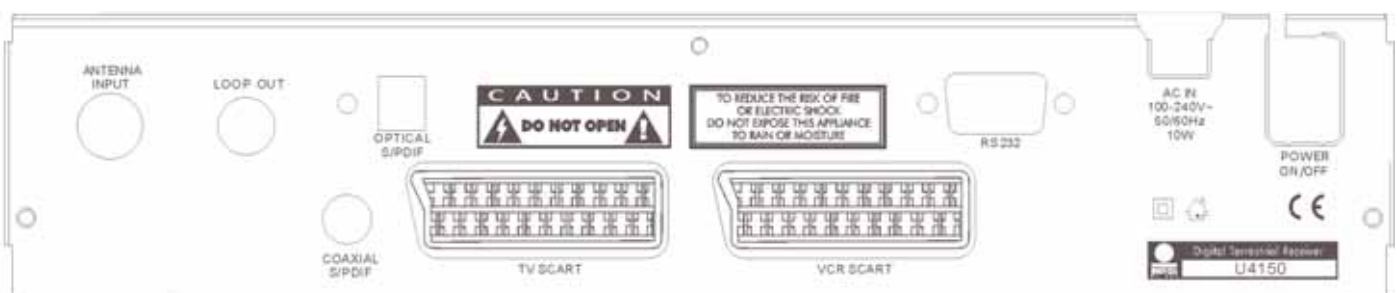

U4148 Receptor TDT / DVB-T	
<b>VIDEO</b>	
Decoding Bit rate Output Aspect ratio Active pixel Output connector	MPEG-2 & MPEG-1 Max 15Mbps NTSC/PAL 4:3, 16:9, Auto "720 x 480 @ 30 fps; 720 x 576 @ 25 fps" Euroconector X2, RCA
<b>AUDIO</b>	
Decoding Sampling rate Output connector	MPEG-2/MPEG -1 Layer I & II 32 /44,1/ 48 Khz Euroconector X2, SPDIF coaxial
<b>DEMODULATOR</b>	
Demodulation Guard	COFDM 2k, 8k 1/4, 1/8 , 1/16, 1/32
<b>INPUT SIGNAL</b>	
Frequency Input Level	VHF-UHF - 78 dBm - 20 dBm
<b>MISCELLANEOUS</b>	
Supply voltage Power consumption Operation temperature Storage temperature Dimension (W x D x H) Weight	100 - 240 Vac 50-60hz z. 30 W +5° a +40° -20° a +70° 80x 190 x 55 mm 1,3Kq