


U5500: MPEG4 Digital Terrestrial PVR Ready



Rear

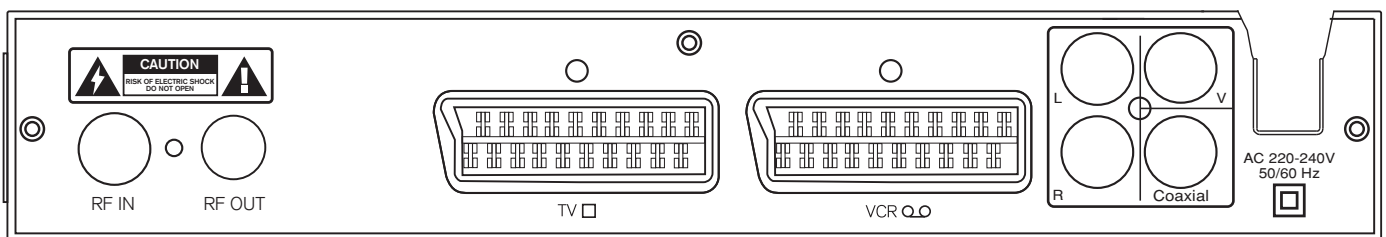

U5500 MPEG Digital Terrestrial PVR Ready	
VIDEO	
Decoding Output Aspect ratio Output connector	MPEG-1 / MPEG-2 MP@ML / MPEG-4 AVC / H.264 HP @L3 PAL/NTSC 4:3 PS, 4:3 LB, 16:9, Auto Scart / RCA
AUDIO	
Decoding Output connector	MPEG-1 Layer 1,2 PCM / AC3 / HE-AAC V1.0 Scart / RCA / Coaxial SPDIF
DEMODULATOR	
Standard Demodulation Guard Interval FEC	DVB-T COFDM (QPSK / 16 QAM / 64 QAM) 2k, 8k 1/4, 1/8, 1/16, 1/32 1/2, 2/3, 3/4, 5/6, 7/8
INPUT SIGNAL	
Frequency Input Level Band width Rf Input connector RF Loopthrough Connector	125 - 862 MHz -20dBm - 78dBm 7 MHz / 8 MHz IEC Female IEC Male
MISCELLANEOUS	
USB Connector Supply voltage Power consumption Standby consumption Operation temperature Dimension Weight	2.0 220~240VAC 50~60 Hz <8 W <2 W 0°C to +40°C 235 x 135 x 36 mm 0.63 Kg