


U6000 High Definition DVB-T with CI



Rear

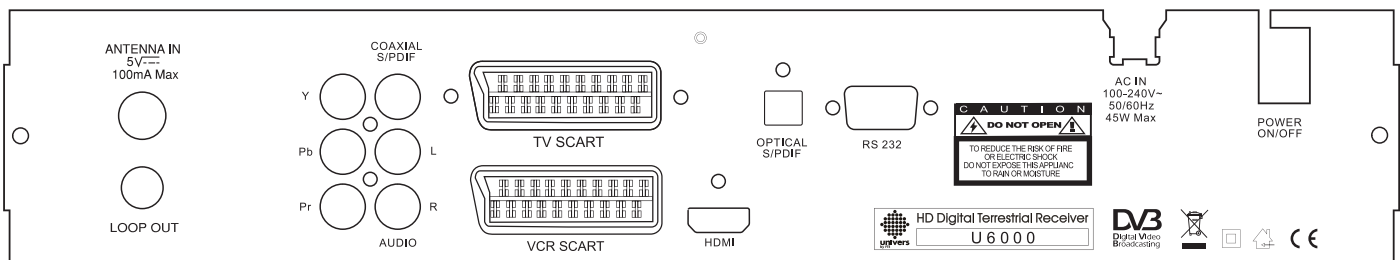

U6000 High Definition DVB-T with CI	
GENERAL	
Reference Reception range Memory places OSD Language Electronic Program Guide (EPG) Integrated tele text decoder Data connections Input Impedance Common Interface	U6000 DVB-T (VHF + UHF) 4000 English, German, French, Spanish, Italian, Portuguese, Swedish, Finnish, Turkish, Norwegian, Russian Yes Yes RS232 75 Ohm 2 X CI module
VIDEO	
Decoding Bit Rate Output Screen format Resolution Connections	MPEG-MP@ML, MPEG-2 MP@HL, MPEG-4 AVC/H.264 HP@L4 Max 15Mbps NTSC / PAL / SECAM 4:3 / 16:9 720x576, 1920x1080i HDMI, TV-Scart(CVBS), VCR-Scart(CVBS), YUV
AUDIO	
Decoding Sampling rate Connections	MPEG/MusiCam Layer I & II 32 / 44,1 / 48 HDMI, TV-Scart, VCR-Scart, RCA, S/PDIF coaxial, S/PDIF optical
DEMODULATION	
Demodulation Guard Input data rate	COFDM 2k, 8k 1/4, 1/8, 1/16, 1/32 2-45 MS/s
INPUT SIGNAL	
Frequency range Input level	VHF-UHF -76dBm -20dBm
DIVERS	
Power supply Consumption Size (LxWxH) Weight	100~240VAC, 50Hz~60Hz Typ. 20W, max. 45W 360x270x65mm 2,2 Kg