


U6500: HD Digital Terrestrial PVR Ready



Rear

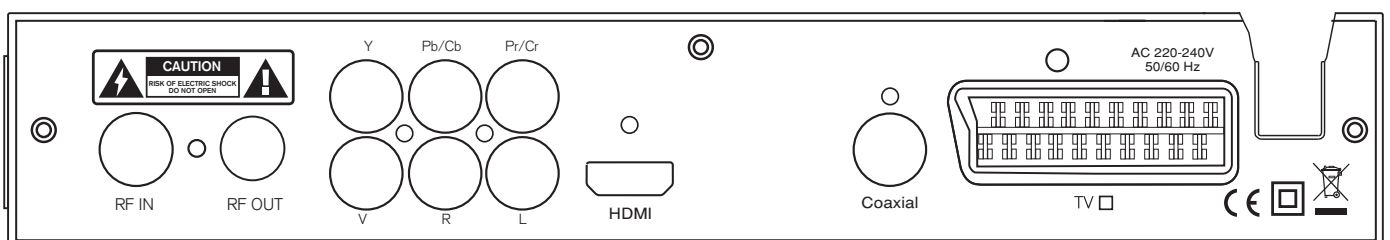

U6500 HD Digital Terrestrial PVR Ready	
VIDEO	
Decoding Output Bit rate Aspect ratio Active pixel Output connector	MPEG4 AVC/H.264 HP@L4, MPEG-2 PAL 4:3 PS, 4:3 LB, 16:9, Auto 576i 576P/720P/1080i HDMI / Scart / RCA / Y,Pb,Pr
AUDIO	
Decoding Output connector	AAC/AC3/PCMII/Dolby Digital + HDMI / Scart/ RCA / Coaxial SPDIF
DEMODULATOR	
Standard Demodulation Guard Interval FEC	DVB-T COFDM (QPSK / 16 QAM / 64 QAM) 2k, 8k 1/4, 1/8, 1/16, 1/32 1/2, 2/3, 3/4 , 5/6, 7/8
INPUT SIGNAL	
Frequency Input Level Band width Rf Input connector RF Loophrough Connector	174 - 230 MHz, 470 - 862 MHz -20dBm - 78dBm 7 MHz / 8 MHz IEC Female IEC Male
MISCELLANEOUS	
HDMI USB Connector Supply voltage Power consumption Standby consumption Operation temperature Dimension Weight	1.2 2.0 220~240VAC 50~60 Hz <8 W <2 W 0°C to +40°C 235 x 135 x 36 mm 0.66 Kg