


U5101 Digital FTA DVB-S Receiver - Twin Tuner and HDD



Rear

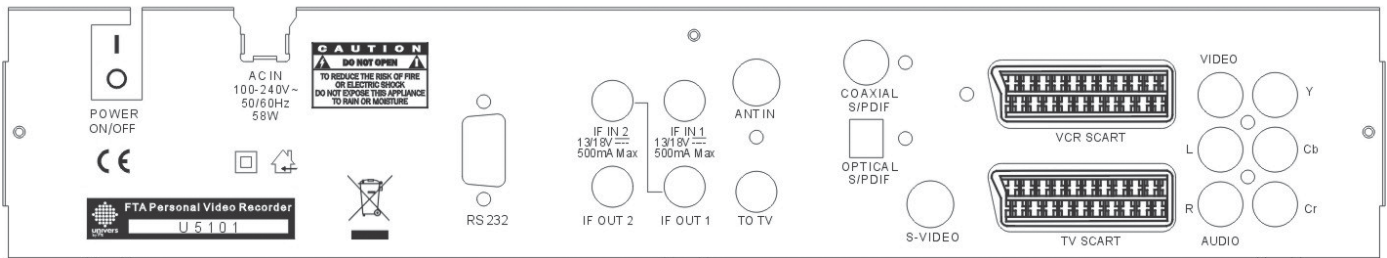

U5101 Digital FTA DVB-S Receiver - Twin Tuner and HDD	
GENERAL	
Model	U5101
Reception range	DVB-S
Memory places	8000
OSD Language	English, German, French, Spanish, Italian, Portuguese
Codes of the remote control	3
HDD capacity	160 Gb
Electronic Program Guide (EPG)	Yes
Picture In Picture function (PIP)	Yes
LPC mode for save current in Standby	Yes
Time Shift	Yes
Easy Recording Function	Yes
Recording over EPG	Yes
MP3 Music music	Yes
Pictures JPEG / PNG	Yes
Decoder teletext embedded	Yes
Memory teletext	800 pages
Data connections	RS-232, USB 2.0 HighSpeed
VIDEO	
Format	MPEG-2 & MPEG-1 compatible
Bit Rate	Max 15Mbps
Output	NTSC/ SECAM / PAL
Screen format	4:3 / 16:9 / Auto
Resolution	720X480 @ 30fps; 720X576 @ 25fps
Connections	S-VHS, Scart (RGB), YUV or RCA
AUDIO	
Decoding	MPEG-2/MEPG-1 layer 1 & 2
Sampling rate	32 / 44,1 / 48
Connections	RCA, AC3 coaxial, AC3 optical
DEMODULATION	
Demodulation	QPSK
FEC	All supported by DVB-S
Input data rate	5-31
INPUT SIGNAL	
Frequency range	VHF-UHF
Input level	- 78 dBm – 20 dBm
RF MODULATOR	
Band	UHF C21-69
TV Standard	PAL BG / I / DK, NTSC
Output channels	21~69(PAL), 14~83(NTSC)
MISCELLANEOUS	
Antenna Feeding x2	13/18 VDC – 0/22 Khz 400 mA max
Voltage Input	90~260VAC 50Hz~60Hz
Consumption with HDD working	38,6 VA / 18 ,7 W max.
Consumption in LPC mode	5,3 VA / 1,3 W
Dimensions	360x250x65mm
Weight	2,6 Kg