



U4103 Digital Receiver DVB-S FTA + FreeX TV subscription

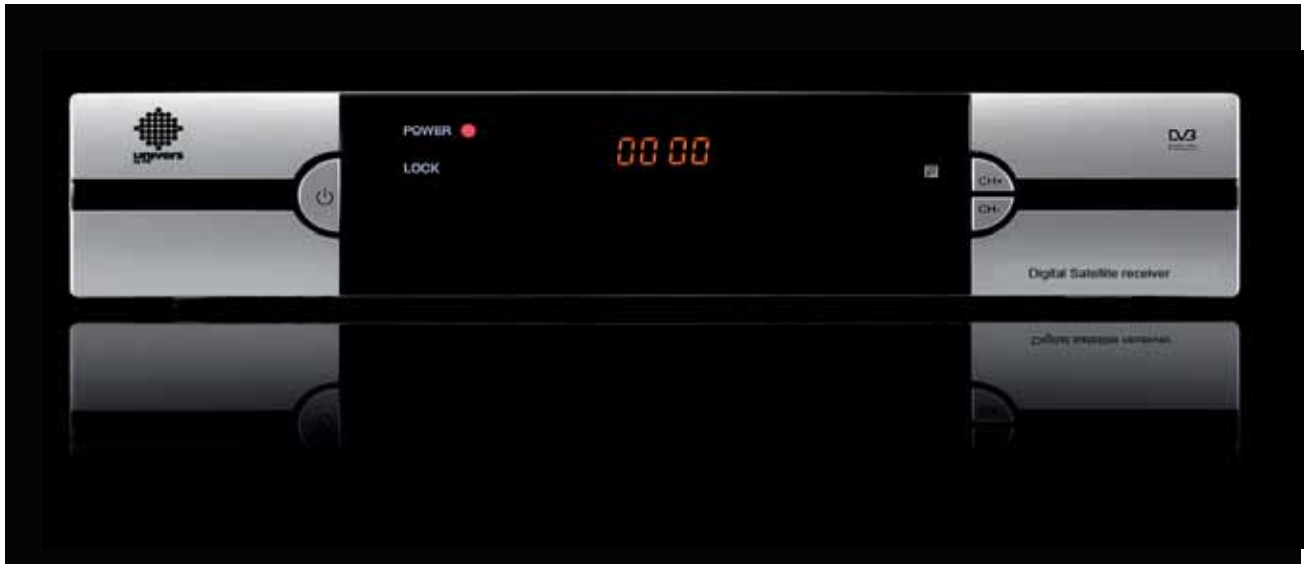

Rear

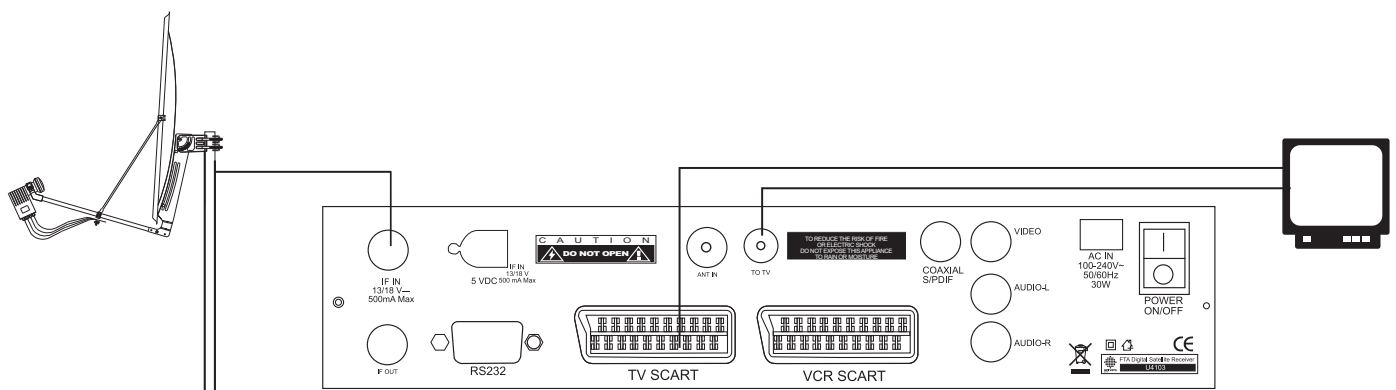

U4103 Digital Receiver DVB-S FTA + FreeX TV subscription	
VIDEO	
Decoding Bit rate Output Aspect ratio Active pixel Output connector	MPEG-2 & MPEG-1 Max 15Mbps NTSC/PAL 4:3, 16:9, Auto 720x480 @ 30fps; 720x576 @25fps Péritel y RCA
AUDIO	
Decoding Mode Bit rate	MPEG-2/MPEG-1 layer I & II Mono, Dual, Stereo, Joint stereo Max 384Kbps
DEMODULATOR	
Demodulation Symbol rate Outer code Inner code	QPSK SCPC/MCPC RS (204, 188, 8) Tous les supportés par la norme DVB
INPUT SIGNAL	
Frequency Input level Channel bandwidth Input socked	950MHz ~ 2150MHz -25dBm à -65dBm / 82 dBµV à 42 dBµV 36MHz F-type
RE MODULATOR	
Band TV Standard Output channel	UHF PAL BG / I / DK, NTSC M 21 a 69 (PAL), 14 a 83 (NTSC)
LNB CONTROL	
Power supply DiSEqC control	13/18V (500mA max) with short circuit protection DiSEqC DISEqC 1.2
MISCELLANEOUS	
Memory Power supply Power consumption Dimension (W x D x H) Weight	90~260VAC 50~60Hz Max. 30W 280x207x65 mm 1,3 Kg